


Vitrum II BS Rolldown Shutters and Curtains Control Wireless

cod. 02B020010

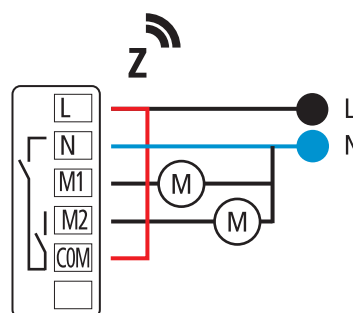

FUNCTIONAL SPECIFICATION

- Two-button for controll of rolldown shutters and curtains
- Touch control with capacitive technology and concave surface for tactile Feedback
- Acoustic feedback signal
- Crown backlit by low-consumption LEDs

COMMAND MODE

- Two capacitive button with "On-Off" control:
Up-Down - Open-Close

MECHANICAL CHARACTERISTICS

- Box British 1 Gang (wall or plasterboard)
- Dimension 95x95mm
- Depth at sight 8 mm
- Operating temperature: 0-40°C
- Button Diameter 16 mm
- Light ring diameter 20 mm
- Weight: 220 g.

ELECTRICAL CHARACTERISTICS

- Power: 230V ac
- Energy consumption: < 1W
- Configuration: 3 wires
- Relays 16 A (P.F.=1)
- Output >20 VA e < 800 VA for electric motor
- Frequency of communication: F.M. 868.4MHz - R.F radiated power <1mW
- R.F. Range: 20 m. **MAX** (open field)

Compliant with:

CEI EN 60669-2-1

Compatibility E.M.C.: CEI EN 55015

Radio: ETS 300683